

Bollards



Diffused lighting distribution developed for iMarine guarantees visual comfort, safety and improved quality of space.

Architectural LED bollard and light column range inspires architects, designers and system integrators with its exceptional quality, functional lighting and remarkable creativity.

Robust and Attractive


Stylish bollard with clear lines and opal diffusers provide high visual comfort and glare control. The mariner engineered centrifugal steel housing is designed to withstand the harsh marine and land environments. High degree of resistance and robust structure.

For all its diversity and flexibility, iMarine with its purist look stands for an attractive structure that enhances urban environments both by day and by night with design and lighting effects. Basic form in geometry meets the most innovative technology to create this product with its ultra-modern style.

Solid Design and Easy to Install

The solid luminaire, which is equipped with an integral power supply unit, is optionally available with DALI control or in the user-friendly On-Off version.


The product is supplied pre-wired, permitting simple, rapid and safe installation.

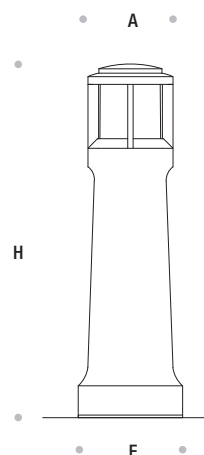

iMarine					
Codes	Power	Colour Temperature	A (mm)	H (mm)	F (mm)
LB2082	12W	3000K / 4000K	160	600	195



For detailed information about the
iMarine

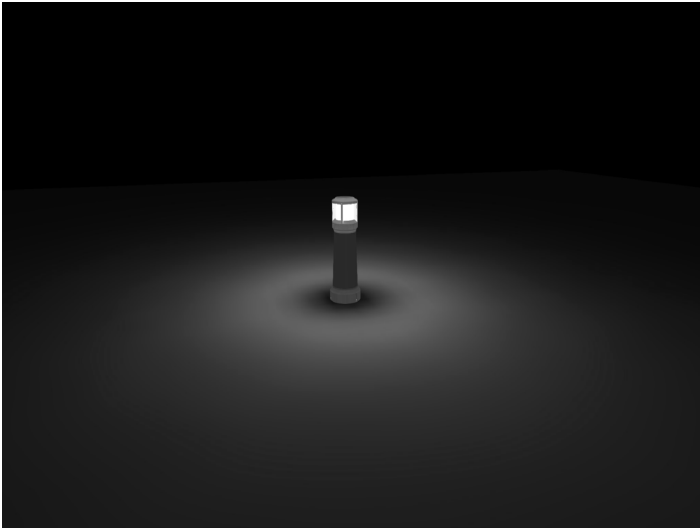

Rotational light distribution



Technical Features

Corrosion resistant marine grade steel centrifugal housing with stainless steel screws (A4 grade) and silicone gaskets. Power unit is built in. Available in anthracite gray as a standard finish or any desired RAL colour.

LED MacAdam Step 3

Nominal Voltage 220V-240V AC, 50/60Hz

Operating Temperature -40°C / +55°C

Control Systems 1-10V DIM, DALI Interface

Protection Class IP65

Impact Resistance IK08

Insulation Class I

Complies with EN60598 and relevant standards.

